



Ultra-Wideband LogPer Antenna up to 35GHz HyperLOG® 60250 & 60350

One LogPer Antenna for the complete frequency range from 680MHz to 35GHz

Highlights

- ◆ Optimal for usage with spectrum analysers or TSCM Receiver
- ◆ Top-quality high-tech TEFLON antenna support
- ◆ Excellent forward/backward ratio
- ◆ Freely alignable polarisation
- ◆ Excellent symmetry of radiation patterns
- ◆ Integrated 1/4" tripod socket
- ◆ Suitable for mobile use
- ◆ Made in Germany
- ◆ **10 years warranty**

Calibration & standards

- ◆ The log-periodic precompliance test antenna of the HyperLOG® 60xxx series are suitable for interference field strength measurement. The specialized broadband characteristics allow measurements to be taken in the complete specified frequency range **without switching**.
- ◆ **These antennas are suitable for measurement according to the following standards and procedures:**
CISPR, VDE, MIL, VG, EN 55011, EN 55013, EN 55015, EN 55022, MIL-Std-461.


Included with delivery

- ◆ HyperLOG® 60xxx-Antenna
- ◆ Typical calibration data with up to 687 calibration points (50MHz steps)
- ◆ Aluminum design carrycase with custom padding
- ◆ Sturdy, detachable pistol grip with "miniature tripod" mode
- ◆ Special Aaronia SMA toolset with over-torque protection


HyperLOG® 60250

- ◆ Design: Logarithmic-periodic
- ◆ Frequency range: **680MHz-25GHz**
Max. transmission power: 50 W CW (800MHz)
- ◆ Nominal impedance: 50 Ohms
- ◆ VSWR (typ.): <math><1:2\text{dB}</math>
- ◆ Gain (typ.): 5dBi
Calibration points: 487 (50MHz steps)
RF connection: SMA (female) or N via Adapter
- ◆ Dimensions (L/W/D): (340x200x25) mm
- ◆ Weight: 250gr
Warranty: 10 years


Gain Diagram HyperLOG 60250

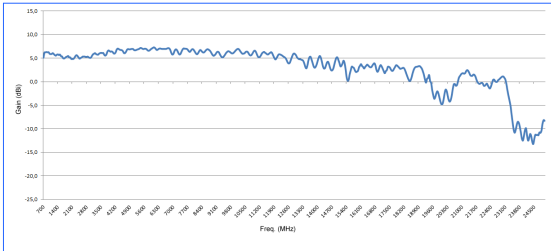

Antenna Factor HyperLOG 60250

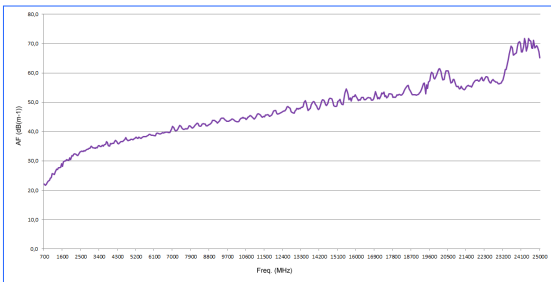


Horizontal Pattern HyperLOG 60xx Serie

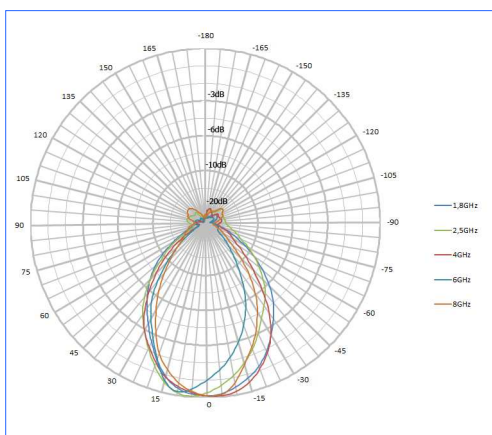


HyperLOG® 60350

- ◆ Design: Logarithmic-periodic
- ◆ Frequency range: **680MHz-35GHz**
Max. transmission power: 50 W CW (800MHz)
- ◆ Nominal impedance: 50 Ohms
- ◆ VSWR (typ.): <math><1:2\text{dB}</math>
- ◆ Gain (typ.): 5dBi
Calibration points: 687 (50MHz steps)
RF connection: SMA (female) or N via Adapter
- ◆ Dimensions (L/W/D): (340x200x25) mm
- ◆ Weight: 250gr
Warranty: 10 years


Gain Diagram HyperLOG 60350

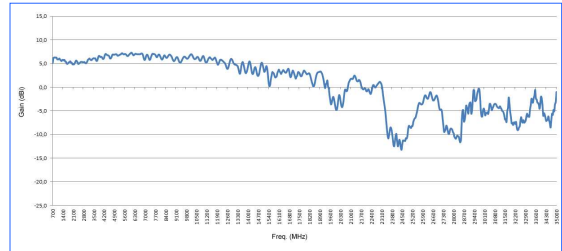

Antenna Factor HyperLOG 60350

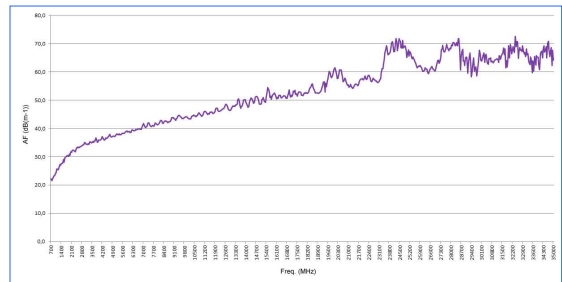

Vertical Pattern HyperLOG 60xx Serie

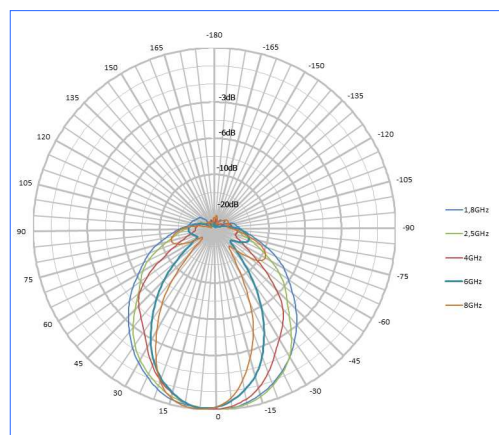

Description



HyperLOG 60xxx Antenna with pistol grip expanded as a miniature tripod

The HyperLOG® 60xxx logger antennas come standard with a specially constructed, high tech radom housing. This housing has been constructed after intense research with the most modern computer technology in such a way that its shape, material and special coating have virtually no influence on measurements, not even in case of dew or other kinds of humidity collecting on the surface. Another important factor for Aaronia was the development of a radom with the lowest possible damping factor achievable. This turned out to be quite an adventure for our development team, particularly in the high GHz ranges. Fortunately, this adventure has been mastered resulting in a beautiful, elegant design, to the complete satisfaction of the development team. Our first test measurements even by far surpassed our guidelines!


The resulting antenna had the best possible protection against mechanical stress and environmental influence without sacrificing any of its performance.



Lot of space for optionally accessories:
The HyperLOG® transportcase

With their log-periodic measurement antennas from the HyperLOG® 60xxx series, Aaronia finally offers a very cost-effective alternative, which at the same time meets the highest expectations. In conjunction with the HyperLOG® antennas, every regular spectrum analyser becomes a fully professional directional RF measurement device within a few moments. Thus, a perfect "dream team" for EMC measurement in the laboratory or for outdoor use is at your disposal.

Due to their small weight and the multi-functional handle, these antennas are the optimal supplement for portable EMC measurement devices for locating and evaluating any kind of signal source.

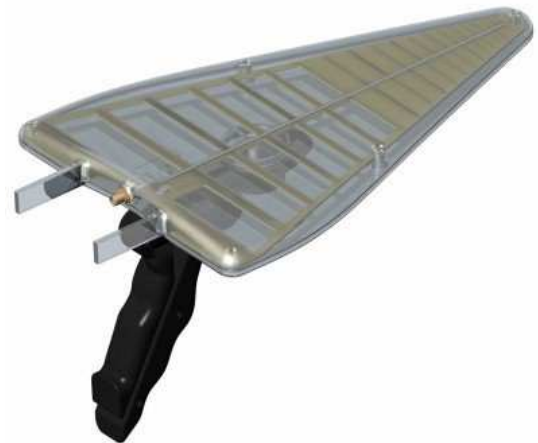

Also available in a "transparent" finish at extra charge

Included with delivery: A sturdy aluminum design carrycase with custom padding for the antenna, cables and accessories. Furthermore, every antenna of the HyperLOG® 60xxx series includes a detachable multi-functional pistol grip with "miniature-tripod" mode and an appropriate SMA toolset.